


ENDURA® STYLE RING

MULTIFACETED LED WALL AND CEILING LUMINAIRES



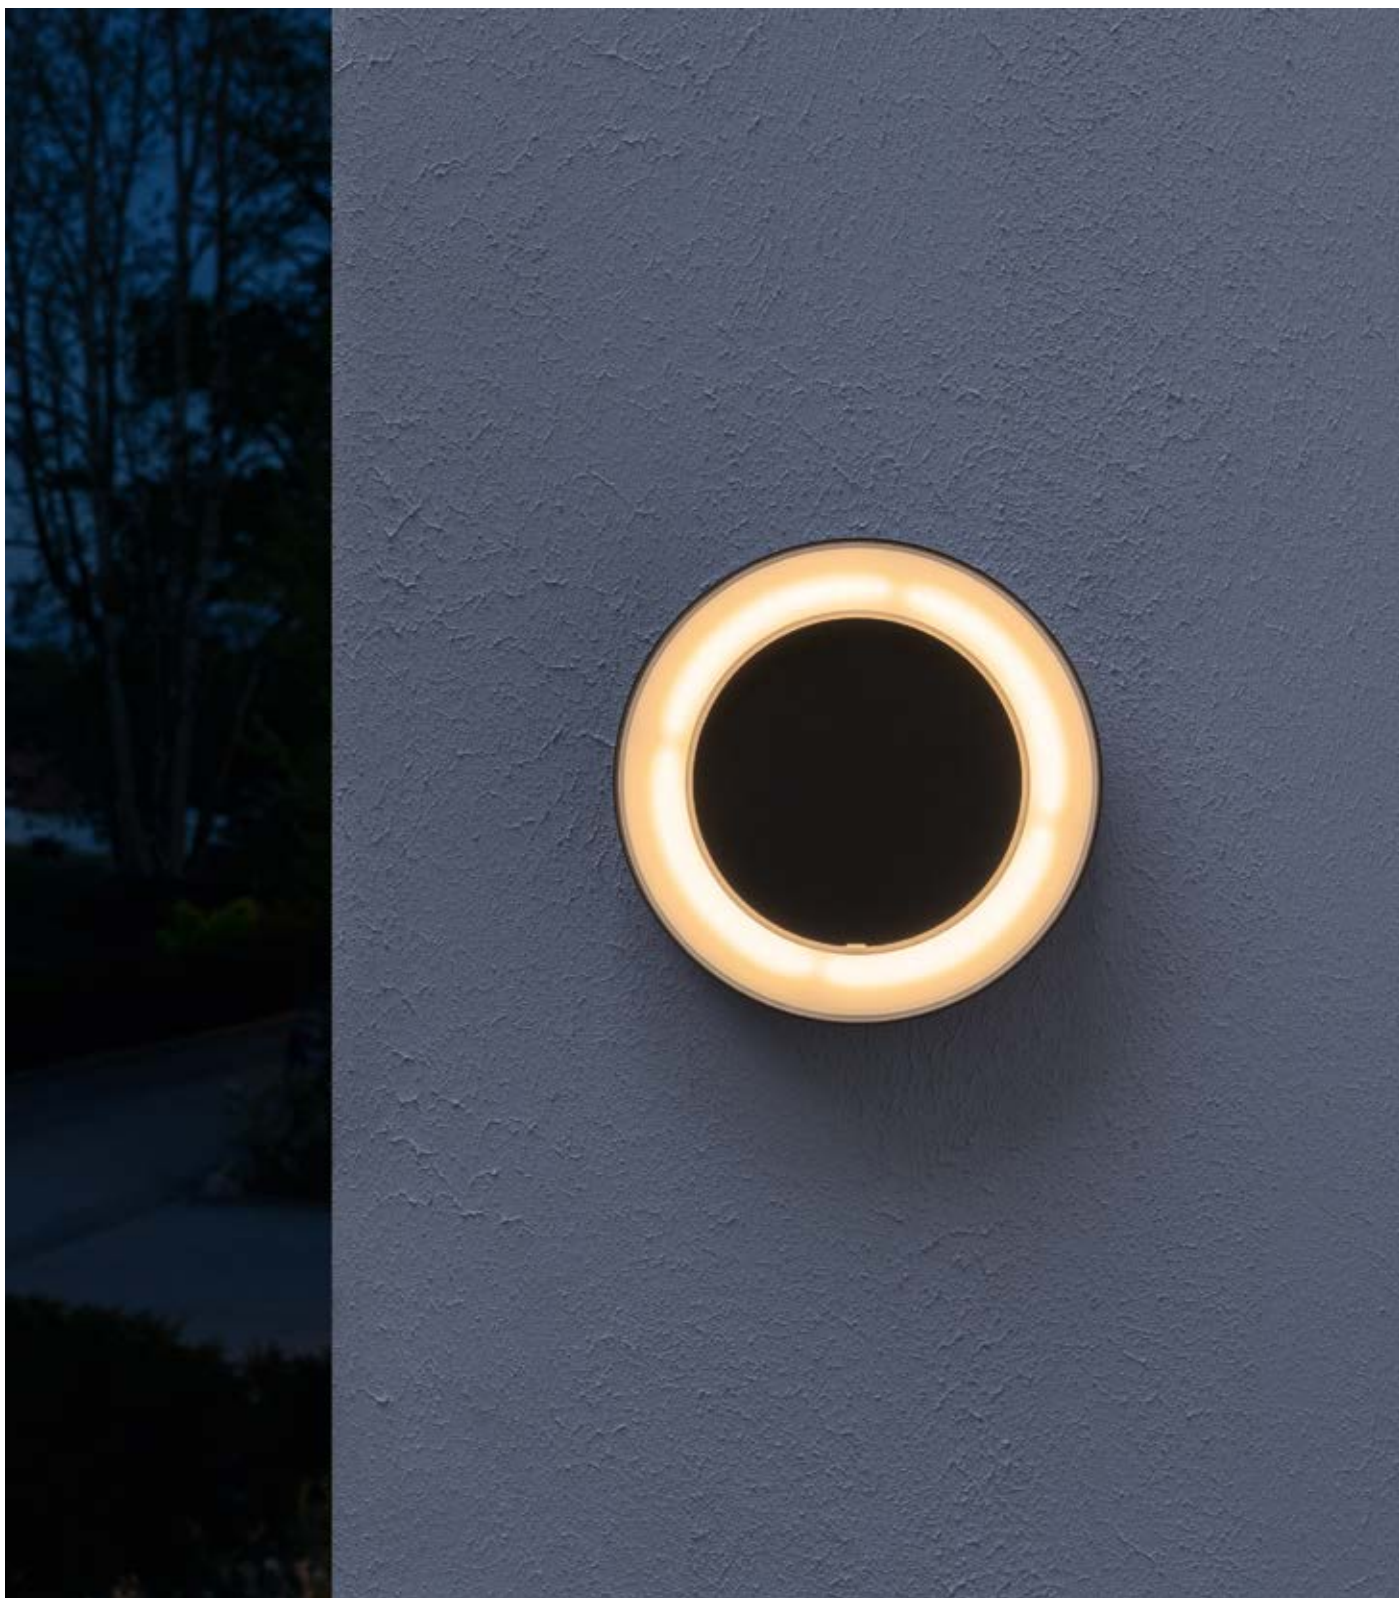

1
ENDURA STYLE Ring RD
13 W DG



Product name	GTIN (EAN)	 No.	 COLOR	 MATERIAL	 t _h ²	 W	 lm	 ³	 K	 CRI	 IP
ENDURA STYLE Ring RD 13 W DG	4058075205215	1	Dark gray	Aluminum	30000	13.00	480	A++/A+/A	3000	>80	IP44

Product name		 h (mm)	 Ø (mm)	
ENDURA STYLE Ring RD 13 W DG	15000	45.0	202.0	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | ² Average lifetime in hours | ³ Energy efficiency grade of the permanently integrated, non-exchangeable LED modules. Energy efficiency index (EEL) on a scale of A++ (highest efficiency) to E (lowest efficiency).